




Centering Bushes for clamp 11086

Heavy-Duty Side Clamping

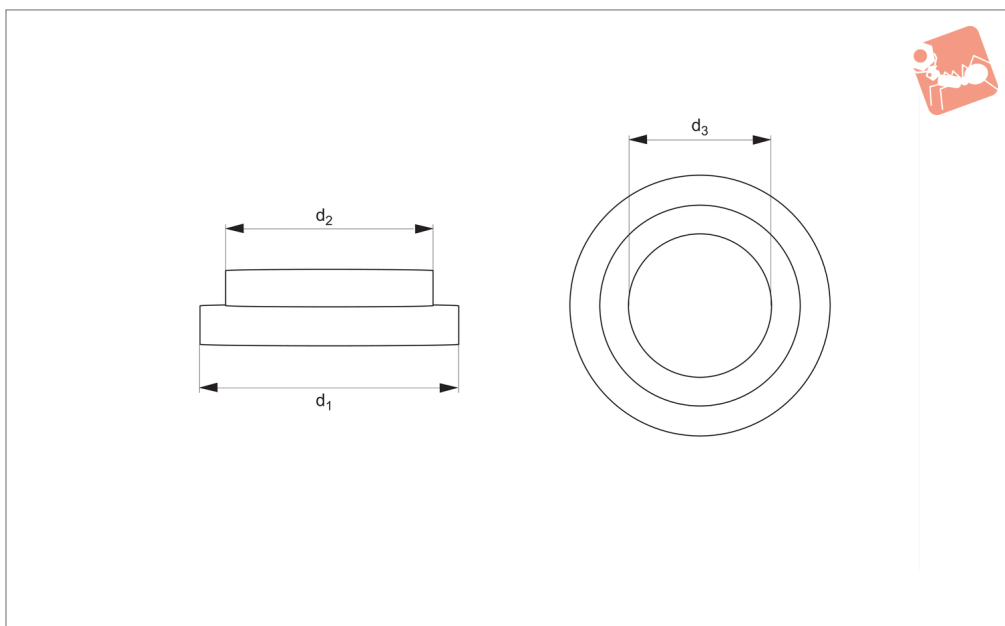

11095


HEAVY-DUTY SIDE CLAMPING

Tips

Centering bushes for use with finger clamps mounting bars 11086. Their use


enables immediate alignment of the clamp to the T-slot and hence prevents any movement of components.

Order No.	Slot size	d ₁	d ₂	d ₃
11095.W0220	12	18	12	10.2
11095.W0225	14	18	14	10.2
11095.W0230	16	18	16	12.2
11095.W0215	18	18	18	12.2
11095.W0235	20	18	20	12.2
11095.W0240	22	18	22	12.2

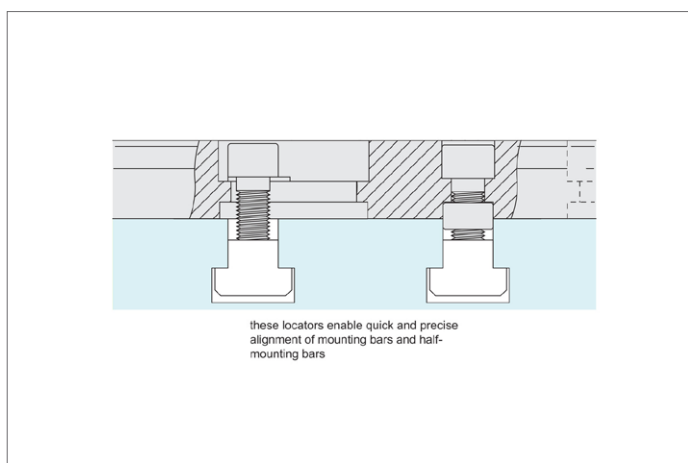



Application

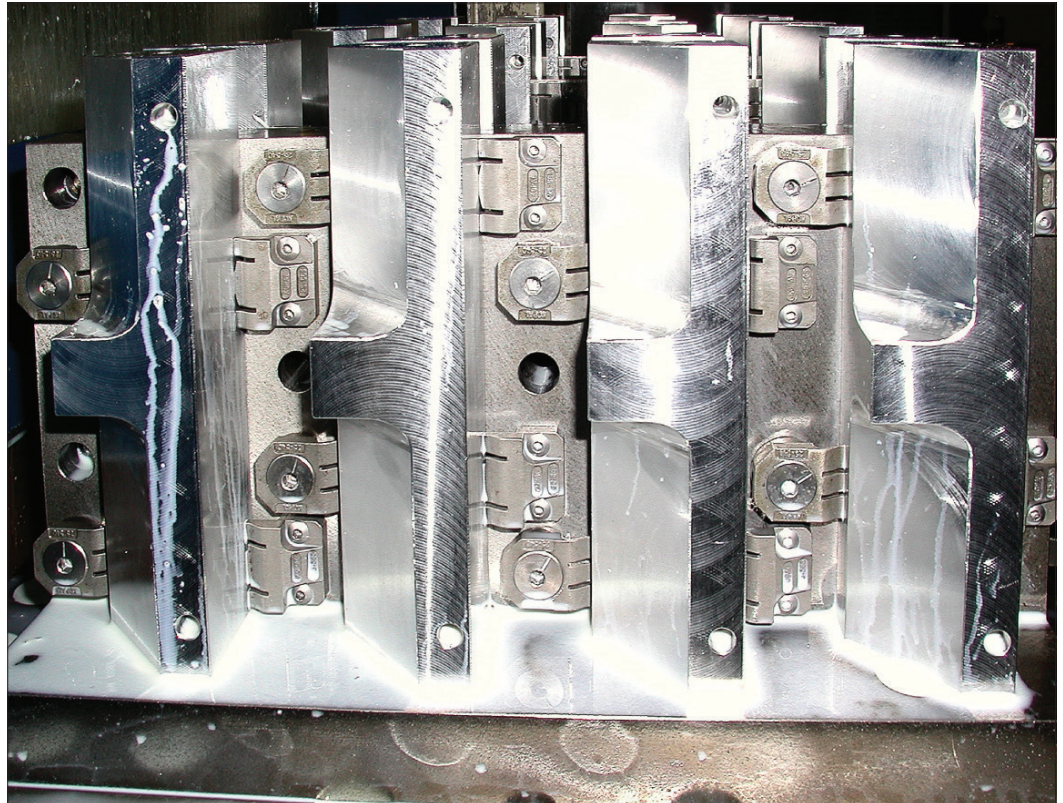


HEAVY-DUTY SIDE CLAMPING

Unique Horizontal Clamping Set-Ups


Part No. 10900, 10920, 10940
T-slot table and special machining set-ups




Part No. 11040, 11041, 11042, 11043
Supports and special machining set-ups

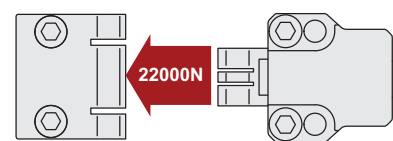

Part No. 11070, 11071
Supports and special machining set-ups

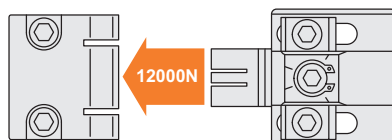

Part No. 11080, 11081, 11083
T-slot table, supports and special machining set-ups

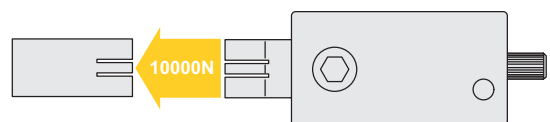




Unique Action - "three finger" Clamping

Our horizontal clamps have a unique "three finger" arrangement ensuring components are both pulled down and clamped in the same motion. The face of the clamp is made of three parts or "fingers":

- Two outer flexible fingers ①; for pulling down the component to the work table.
- One solid central finger ②, to provide direct clamping action.

Available in two styles – smooth and serrated face. They can also cater for workpieces with an adverse angle on the clamping face – for example flame cut steel blanks.

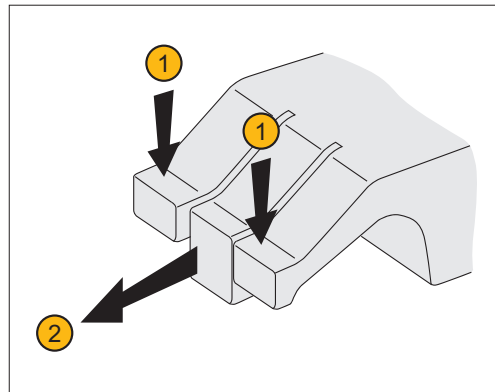

Pull down AND clamp with the highest of clamping forces – from 0,4 tons to 2,2 tons!


Used in our clamping series:

**10900, 10940, 10880,
10920, 11040, 11041,
11042, 11043, 11070,
11071, 11080, 11081,
11082, 11083**

Clamping Action


The clamps outer flexible fingers ① are approx. 0,25mm longer than the solid central finger/clamping stop ②, this slight difference in length means it is the flexible fingers which first come into contact with the workpiece.

As initial contact is made with the work-piece the flexible fingers ① apply downward pressure forcing the workpiece down against the work table, the flexible fingers are compressed until they are the same length as the solid central finger/clamping stop ②.

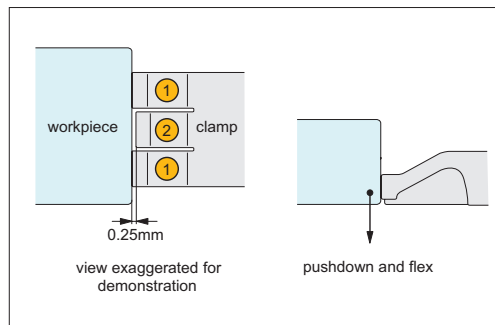


Contact

As the solid central finger/clamping stop ② comes into contact with the work-piece it applies high side clamping pressure to achieve clamping forces up to 2,2 tons (dependent upon clamping model selected).

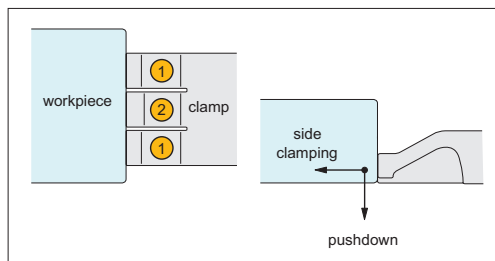

Clamping


During machining the uniquely designed flexible fingers ① continue to flex and twist applying downward pressure to keep the workpiece flat to the work table throughout.

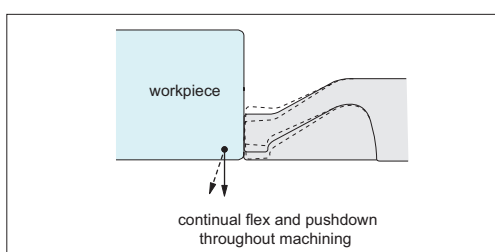

Machining


Precision Positioning

The unique clamping action achieves precision positioning of workpieces – ensuring the workpiece remains parallel to the reference surface.

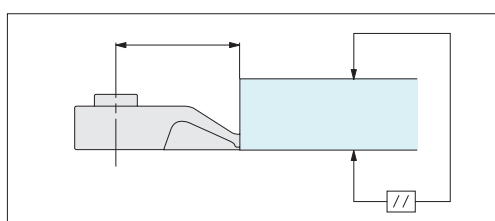




Clamping Torque

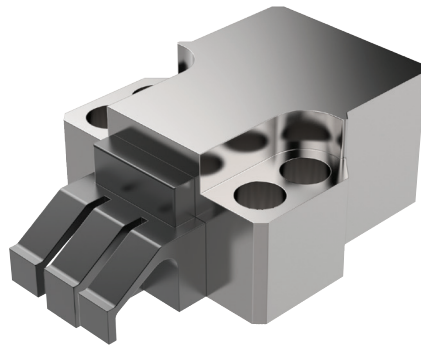


11040/CL2040

Clamping Torque	Clamping Force
N/m	N
50	23000
40	18000
30	12500
25	11500
20	9500

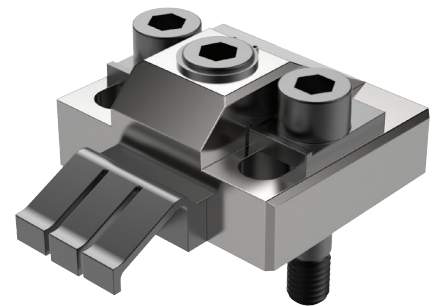

11070/CL2070

Clamping Torque	Clamping Force
N/m	N
60	16500
50	15000
40	12000
30	10000
25	8000
20	7000

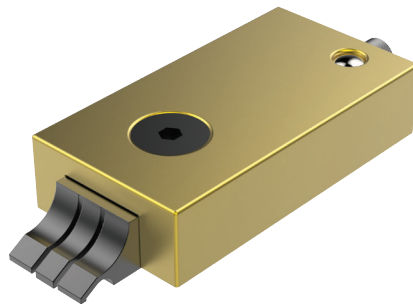

11081/CL2081

Clamping Torque	Clamping Force
N/m	N
5	6600
4.5	5500
4	4900



10940/CL0030

Clamping Torque	Clamping Force
N/m	N
8.5	4000
8	3800
7	3400
6	3000
5	2500
4	2000