




One-Touch Fastener - Cam Locking

quarter turn - t-handle grip - steel



One Touch
Fasteners

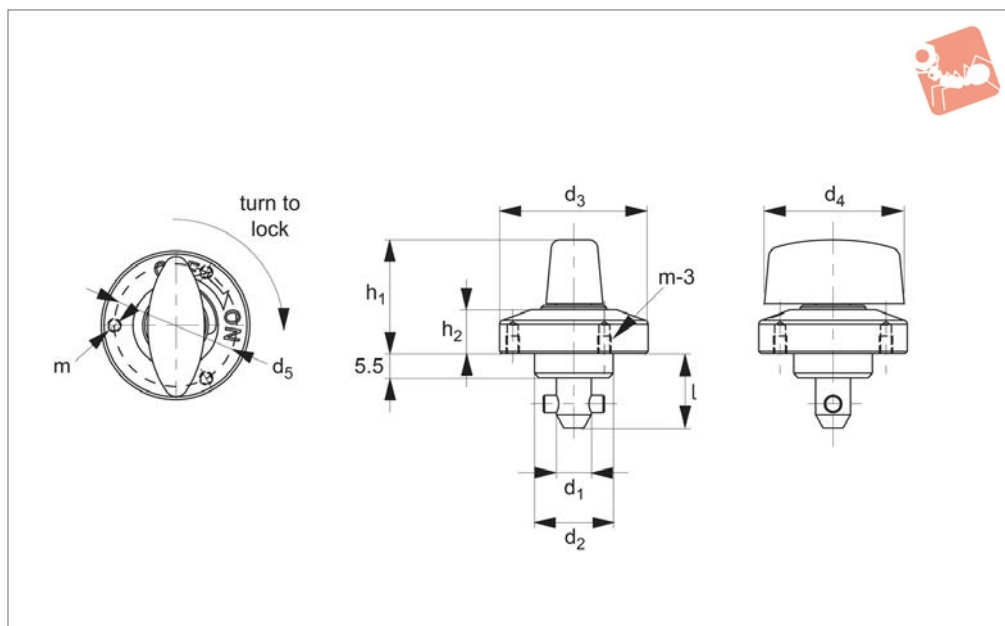

33942

ONE TOUCH FASTENERS

Material

Body, Pin and Knob: SUS303 stainless steel.

Shank: S45C steel nickel plated.
Spring: SWOSC-V steel.

Technical Notes

One-touch fasteners are the ideal solution for applications requiring rapid and recurring change over of tooling or set ups. Use in applications as diverse as bottling

processes, machine covers, changing of cogs and drive belts. One-touch fasteners provide a quick, simple and secure change over solution - no time wasted in unfastening screws or other permanent fixings, and no opportunity for lost fixings in your machinery.

Temperature resistant to 200°C.

Important Notes


Suitable for panels/enclosures of 6 to 20

mm thickness. For locating bushes see part no. 33948 and 33949.

Actuation:





- Turn handle to off position: present cover panel to frame and align to locating bush.
- Turn handle 45° to on position: locking pin follows cam, tightening fastener and securely fastening panel.

Order No.	For single panel thickness	Clamping force N	d ₁ -0.04 -0.08	d ₂ tol. h9	d ₃	d ₄	d ₅	h ₁	h ₂	l	m	Shear strength N	Tensile strength N	Weight g
33942.W1005	6-10	60	5	14	25	20	21	19,0	6,5	15,5	M 2x0,4	1800	1200	40
33942.W1408	6-14	90	8	18	34	32	28	25,5	10,0	17,0	M 3x0,5	3200	2600	130
33942.W2008	12-20	90	8	18	34	32	28	25,5	10,0	23,0	M 3x0,5	3200	2600	135

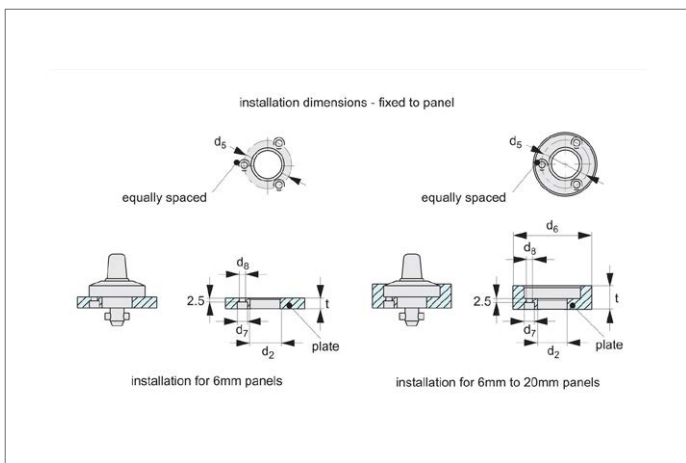



One-Touch Fasteners - Alternatives to Screws

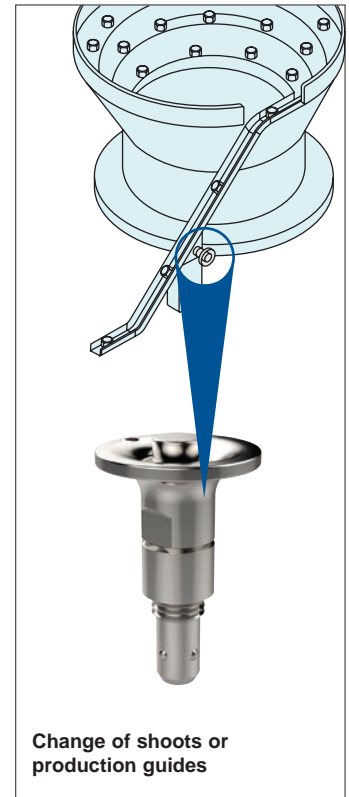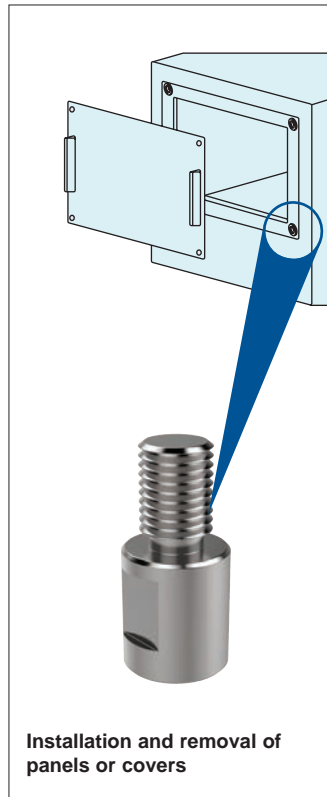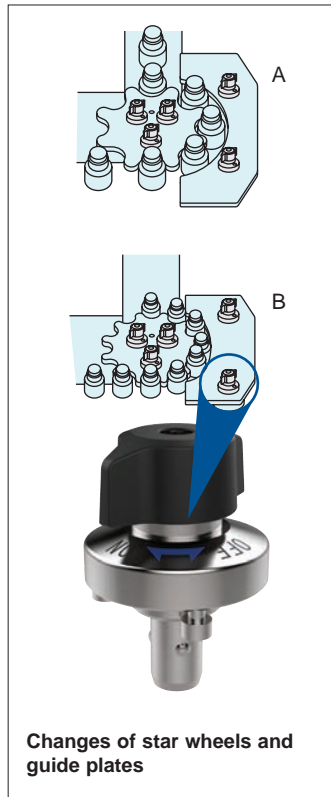
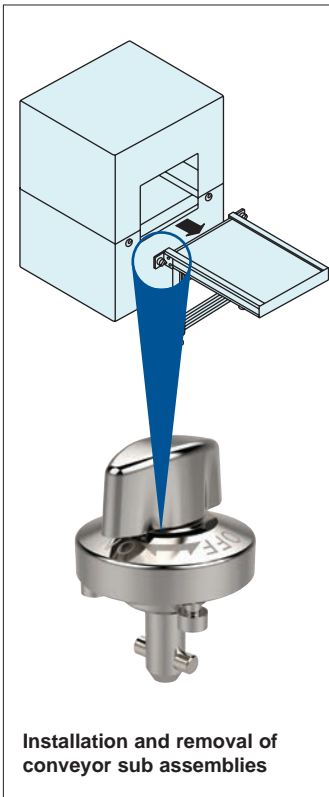


Easy & Secure! For Quick Changeover with No Tools!








One-Touch Change Over

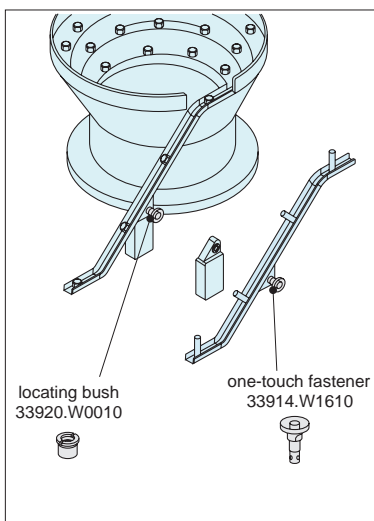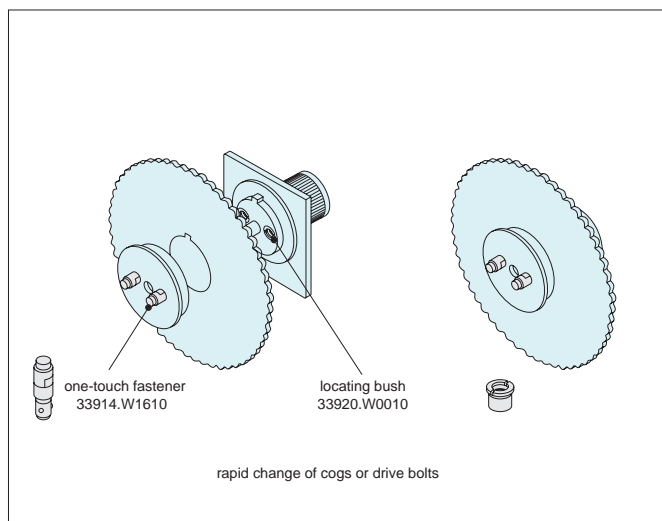

Installation and Removal of Rotary Blades and Changes of Shooters

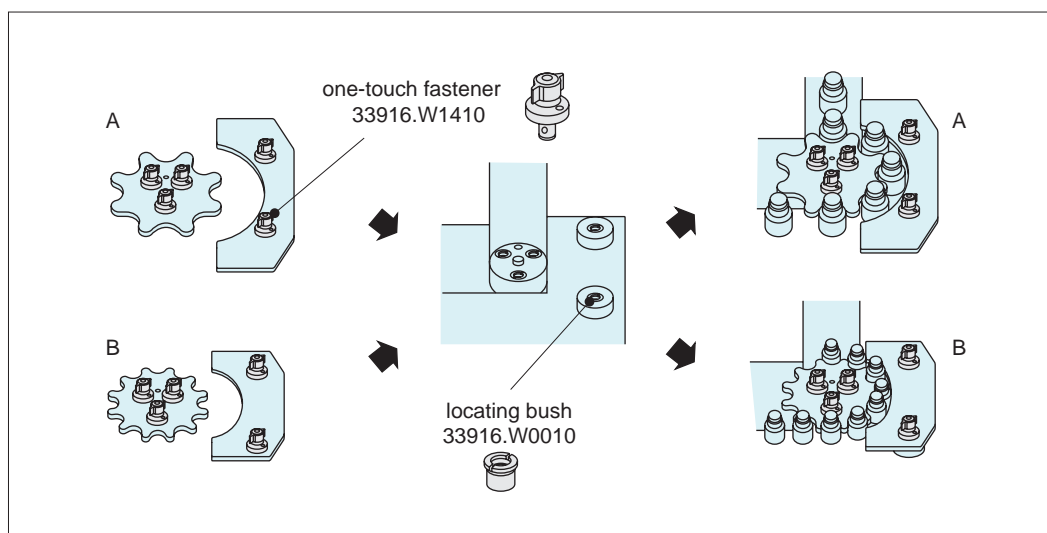

Changes of Star Wheels and Guide Plates

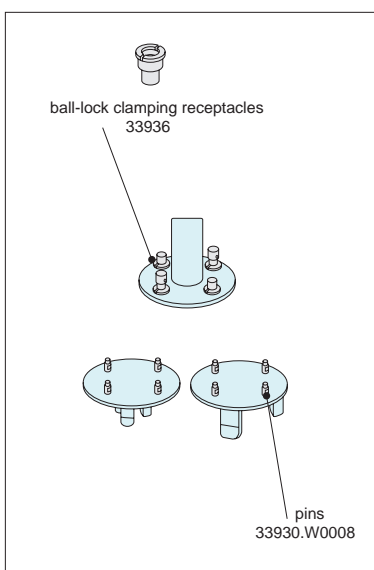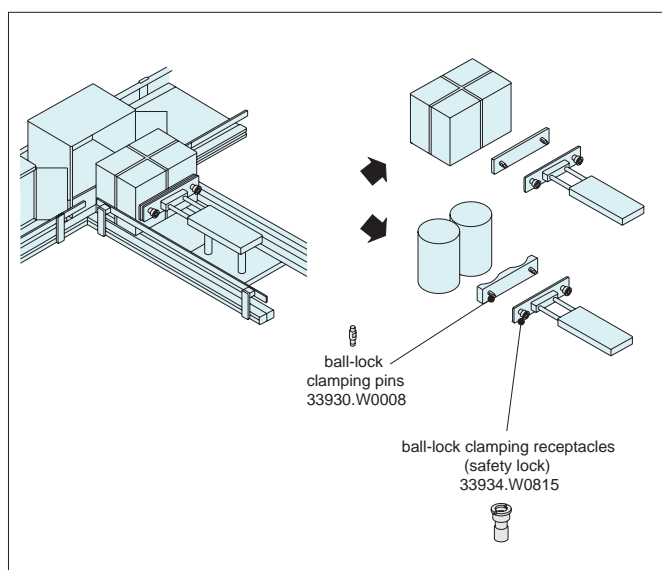

Changes of Pusher and Changes of Chuck Handling Machines