


## Acoustic Suspension Hanger with nut



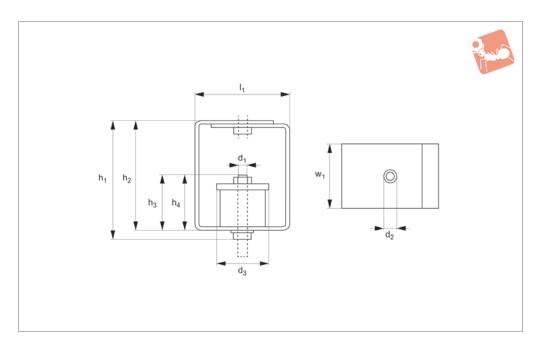

61934

## Material

Steel anti-corrosive zinc plated, with rubber (50 shore A) cylinder.

## **Technical Notes**

These units are designed for installations

where objects are suspended from ceilings. The spring in the body provides good antivibration properties.

The metal hanger is designed to cope with loads up to 1000kg.

## Tips

Select the damper corresponding to the load to be carried per unit.

These hanger can be used for fans, distribution pipes, ducts and acoustic ceilings.

Order No.	$d_1$	$\mathbf{w}_1$	$h_1$	$d_2$	d <sub>3</sub>	d <sub>4</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	$I_1$	Load range kgf
61934.W0030	M 6	40	55.03	M 6	30	18	46.3	38	30	40	8-30
61934.W0060	M 6	40	55.03	M 6	30	18	46.3	38	30	40	25-60
61934.W0100	M 8	55	76.40	M 8	40	16	68.0	43	34	55	40-100
61934.W0150	M 8	55	76.40	M 8	40	16	68.0	43	34	55	80-150



