


Compression Latches - Flexi-System

insert driver - fixed grip - stainless steel





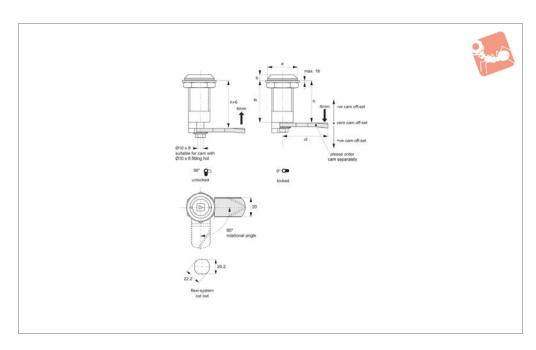

A1603

Material

Body & insert: stainless steel, AISI 304. Insert fitted with O'ring to provide IP54 rating.

Shaft: steel, white zinc plated. **Not supplied:** KEY - order separately.

Technical Notes

Order cam and key separately. **Cams:** see suitable cam A0231 and A0233.

Select "without projection" cam type.

Dimensions ch and cl relate to cam. Use

formula to calculate ch (required cam offset), and refer to cam selection chart;

ch = h - lh where;

ch = required cam off-set/height.

h = grip length (distance between inside of latch face and front of cam).

lh = body length of cam latch/lock to be used (see product table below).

Keys: see A0102.

Tips

Compression locks provide sealing of

enclosures to reduce vibration and to provide noise isolation.

Action:

From unlocked position, first 90° turn moves the cam to the locking position. Turn lock 180° to engage compression, cam moves to final fixing position.

Provides a 6mm compression stroke.

Order No.	Insert driver	Туре	а	b	lh
A1603.AW0020	Square 8	Fixed Grip	28	5	38
A1603.AW0050	Triangle 8	Fixed Grip	28	5	38

