


## **Swing Handles - Cam Control** standard cylinder lock - padlockable - zinc



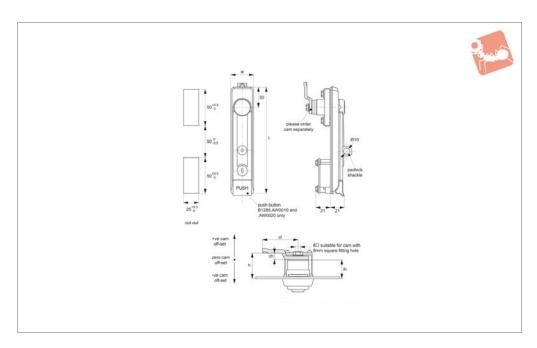

**B1285** 

## Material

Body & Handle: die cast zinc, black powder coated.

Cylinder lock: die cast zinc, chrome plated. **Supplied with:** Keys: two per lock. **Not supplied:** Cam: please order separately.

## **Technical Notes**

Order cam separately.

**Cams:** see suitable cam A0203, A0224 and A0240. Select "without projection" cam type.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart; **ch = h - lh** where;

**ch** = required cam off-set/height.

**h** = grip length (distance between inside of

latch face and front of cam).

lh = body length of cam latch/lock to be
used (see product table below).

Rods & Guides: to achieve 3-point latching - A0303, A0321, A0325.

Order No.	Type	Lock type	Padlockable	Key type	1	w	lh
B1285.AW0010	With Button	Std. Cylinder	No	Keyed Alike	158	34	19
B1285.AW0020	With Button	Std. Cylinder	Yes	Keyed Alike	158	34	19
B1285.AW0030	W/o Button	Std. Cylinder	No	Keyed Alike	158	34	19
B1285.AW0040	W/o Button	Std. Cylinder	Yes	Keyed Alike	158	34	19