


# Cam Latches - Flexi-System insert driver - fixed grip - zinc





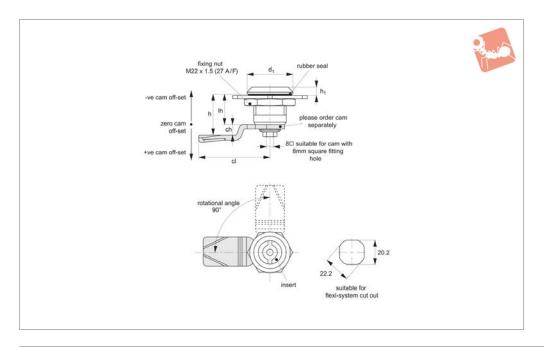

A1003

#### Material

Body & insert: die cast zinc. Finished in chrome plate or black powder coating. Insert fitted with O'ring to achieve IP54 rating. Internal spring provides 1,5mm torsion.

**Supplied with:** Nut: steel, zinc plated. Sealing washer: PU and rubber.

**Not supplied:** CAM nor KEY - order separately.

#### **Technical Notes**

Order cam and key separately.

Cams: see suitable cam A0203, A0224 and A0240. Select "without projection" cam type.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart;

ch = h - lh where;

**ch** = required cam off-set/height.

**h** = grip length (distance between inside of latch face and front of cam).

**lh** = body length of cam latch/lock to be used (see product table below).

**Keys:** see A0102.

**Rods & Guides:** to achieve 3-point latching - A0303, A0321, A0325.

#### **Important Notes**

Extended body version - A1251. Sold subject to pack quantity.

Order No.	Finish	Insert driver	$d_1$	$h_1$	lh
A1003.AW0010	Chrome Plated	Square 7	28	6	18
A1003.AW0310	Black Coated	Square 7	28	6	18
A1003.AW0020	Chrome Plated	Square 8	28	6	18
A1003.AW0320	Black Coated	Square 8	28	6	18
A1003.AW0040	Chrome Plated	Triangle 7	28	6	18
A1003.AW0340	Black Coated	Triangle 7	28	6	18
A1003.AW0050	Chrome Plated	Triangle 8	28	6	18
A1003.AW0350	Black Coated	Triangle 8	28	6	18
A1003.AW0060	Chrome Plated	3mm Double Bit	28	6	18
A1003.AW0360	Black Coated	3mm Double Bit	28	6	18
A1003.AW0070	Chrome Plated	4mm Double Bit	28	6	18
A1003.AW0370	Black Coated	4mm Double Bit	28	6	18
A1003.AW0080	Chrome Plated	Slotted (2x4)	28	6	18
A1003.AW0380	Black Coated	Slotted (2x4)	28	6	18




# ov-WA1261-A-TCC0500-WA2393-A-T-cam-compression-latches-product-selection-chart-c-Inh- Updated -27-10-2022




## **Wixroyd Cam and Compression Latches**

product selection charts



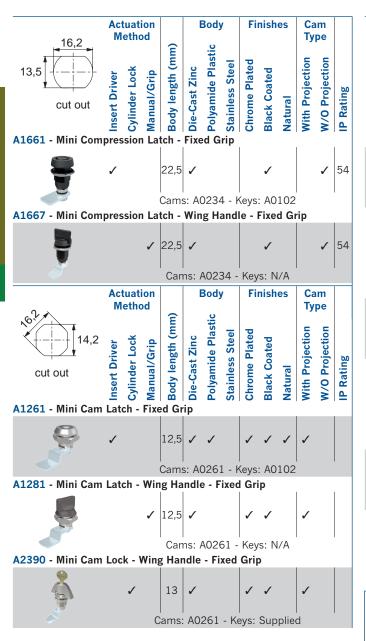

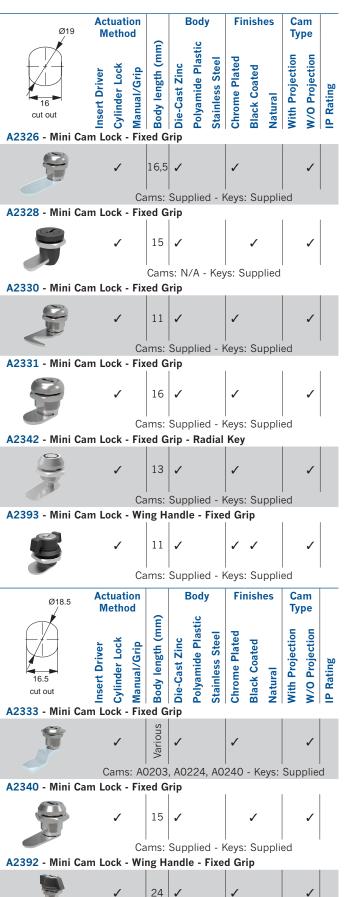


Cams: A0203, A0224, A0240 - Keys: Supplied





## Cam Latches - Snap in - Flexi-System Fixed grip, polyamide



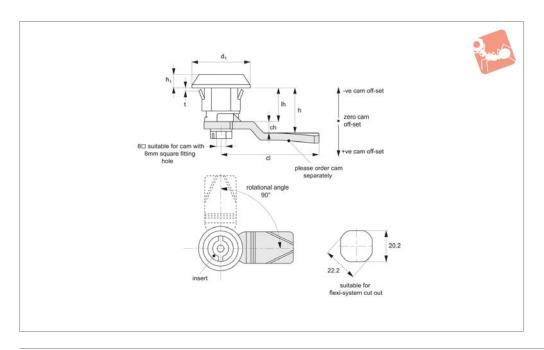



A1004

#### Material

Body: PA plastic. Insert: Die cast zinc.

Supplied with: Nut: steel, zinc plated. Sealing washer: PU and rubber.

Not supplied: CAM nor KEY - order separa-

#### **Technical Notes**

Order cam and key separately.

Cams: see suitable cam A0203, A0224 and A0240. Select "with projection" cam type. Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart; ch = h - lh where;

ch = required cam off-set/height. h = grip length (distance between inside of

latch face and front of cam).

lh = body length of cam latch/lock to be used (see product table below). Suitable for panel thickness 0,8-1,5mm. Keys: see A0102.

#### **Tips**

Easy snap on fix mounting. Make cut out in panel as shown, and simply push in handle, snap on clips will spring back to securely mount handle.

Order No.	Insert driver	$d_1$	$h_1$	t	lh
A1004.AW0020	Square 8	Ø30	7.5	0,8-1,5	18
A1004.AW0075	5mm Double Bit	Ø30	7.5	0,8-1,5	18








# Cam Latches - Snap on sq8, 4mm DB



AM LATCH



A1010

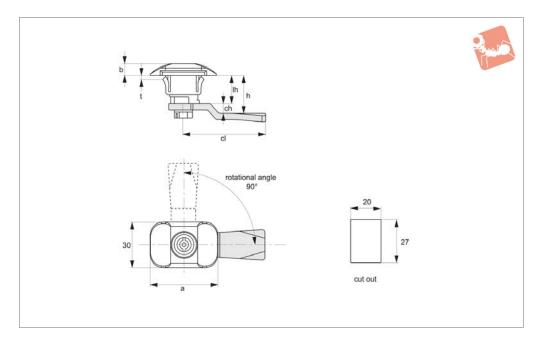

#### Material

Body: Black plastic (PA6). Insert: Zinc.

Not supplied: Cam - order separately.

#### **Technical Notes**

Order cam and key separately. Cams: see suitable cam A0203, A0224 and A0240. Select "with projection" cam type. Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart; ch = h - lh where;

ch = required cam off-set/height.

h = grip length (distance between inside of

latch face and front of cam).

lh = body length of cam latch/lock to be used (see product table below).

Suitable for panel thickness 0,8-2mm.

Keys: see A0102.


Order No.	Insert driver	a	b	t	lh
A1010.AW0020	8mm Square	43	7.5 7.5	0,8-2	17.8
A1010.AW0070	5mm Double Bit	43	/.5	0,8-2	17.8



# **Cam Latches - Flexi-System**

insert driver - fixed grip - plastic



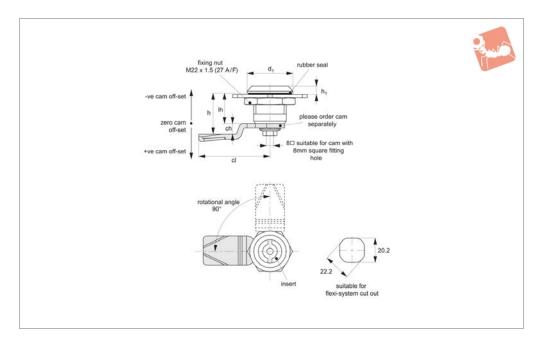



A1021

#### Material

Body: polyamide plastic, black. Insert: zinc alloy, black coated. Fitted with O'ring to achieve IP54 rating. Internal spring provides 1,5mm torsion.

Supplied with: Nut: steel, zinc plated.

Sealing washer: PU & Rubber.

Not supplied: CAM nor KEY - order separa-

#### **Technical Notes**

Order cam and key separately.

Cams: see suitable cam A0203, A0224 and A0240. Select "without projection" cam type.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart; ch = h - lh where;

**ch** = required cam off-set/height.

**h** = grip length (distance between inside of latch face and front of cam).

**lh** = body length of cam latch/lock to be

used (see product table below).

**Keys:** see A0102.

Rods & Guides: to achieve 3-point latching - A0303, A0321, A0325.

#### **Important Notes**

An inexpensive alternative to stainless steel, where water or other solutions may cause corrosion.

Sold subject to pack quantity.

Order No.	Insert driver	$d_1$	$h_1$	lh
A1021.AW0010	Square 7	28	6	18
A1021.AW0020	Square 8	28	6	18
A1021.AW0040	Triangle 7	28	6	18
A1021.AW0050	Triangle 8	28	6	18
A1021.AW0060	3mm Double Bit	28	6	18
A1021.AW0070	4mm Double Bit	28	6	18
A1021.AW0080	Slotted (2x4)	28	6	18





# **Cam Latches - Flexi-System** insert driver - fixed grip - plastic



Available	insert dri	vers:				
Square 7	Square 8	Triangle 7	Triangle 8	3mm Double Bit	4mm Double Bit	2 x 4mm Slotted
7	8	6.5	8	Ø3	Ø <u>4</u>	






## **Cam Latches - Flexi-System**

hygienic - stainless steel



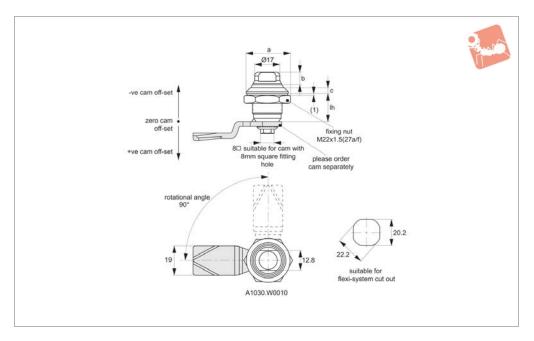



A1030

#### Material

Body, inset and screw: stainless steel AISI 316

Fitted with sealing gasket to achieve IP65 rating.

Sealing washer: silicone.

**Not supplied:** CAM nor KEY - order separately.

#### **Technical Notes**

Order cam key separately.

No need for key. Designed for use with spanner.

**Cams:** see suitable cam A0203 (steel), A0210 (stainless). Select "without projection" cam type.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart;

ch = h - lh where;
ch = required cam off-set/height.

**h** = grip length (distance between inside of latch face and front of cam).

lh = body length of cam latch/lock to be
used (see product table below).

Order No.	
A1030.AW0010	)

Extruded driver
Stadium

a 28 b 8 lh 18




## **Wixroyd Cam Latches**

exploded view and assembly




# **Die-cast Zinc:** A1003, A1181

(also A1103 in stainless steel).

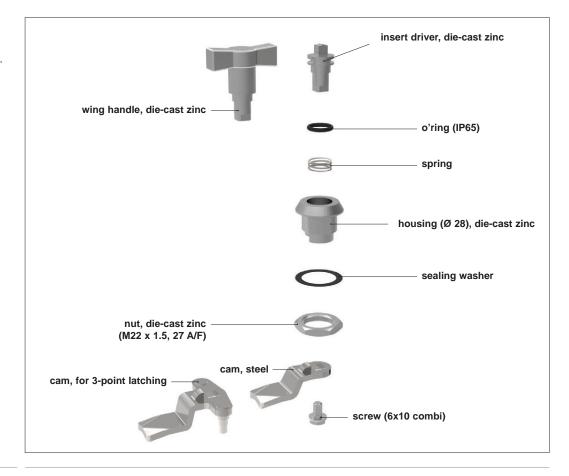

# Plastic: A1021, A1181

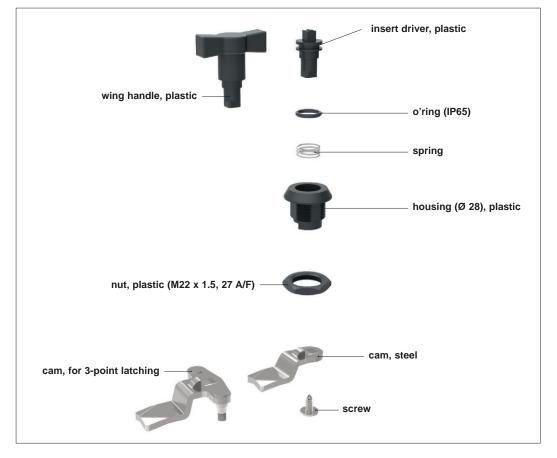






# **Cam Latches - Flexi-System** insert driver - push to close - fixed grip - zinc



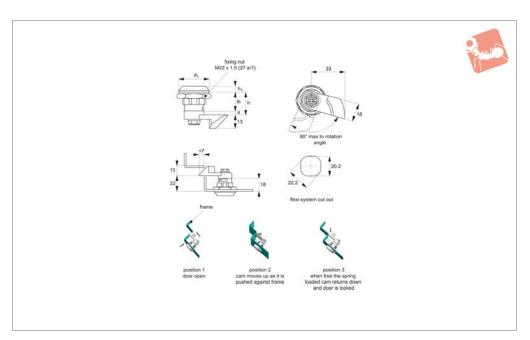



A1041

#### Material

Body & Insert: die cast zinc, bright chrome plated.

**Supplied with:** Cam: die cast zinc, bright chrome plated - fixed off-set of 4mm. **Not supplied:** KEY - order separately.

## Technical Notes Order key separately.

**Keys:** see A0102.

#### **Tips**

Spring loaded cam provides depress-to-lock action. See application drawings for operation. Quarter turn opening or closing. Right hand type for panel with hinges on right side, left hand type for panels with hinges on left side. Grip length of cam

fixed at 22mm (lh + 4mm).

#### **Important Notes**

Sold subject to pack quantity.


Order No.	Type	Insert driver	$d_1$	$h_1$	lh	h
A1041.AW0020	Right	Square 8	28	4	18	22
A1041.AW0050	Right	Triangle 8	28	4	18	22
A1041.AW0070	Right	4mm Double Bit	28	4	18	22
A1041.AW0080	Right	Slotted (2x4)	28	4	18	22
A1041.AW0520	Left	Square 8	28	4	18	22
A1041.AW0550	Left	Triangle 8	28	4	18	22
A1041.AW0570	Left	4mm Double Bit	28	4	18	22
A1041.AW0580	Left	Slotted (2x4)	28	4	18	22







A1103

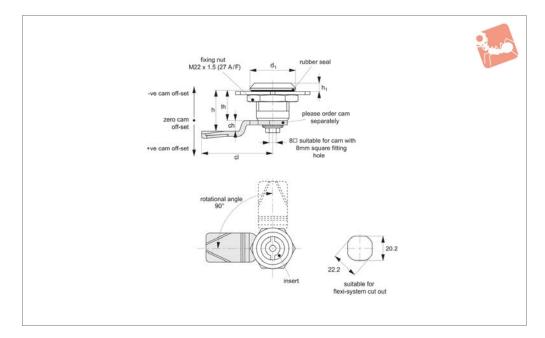

#### Material

Body & Insert: stainless steel, AISI 304. Insert fitted with O'ring to achieve IP54 rating. Internal spring provides 1,5mm torsion.

**Supplied with:** Nut: stainless steel. Sealing washer: PU & Rubber.

**Not supplied:** CAM nor KEY - order separa-

#### **Technical Notes**

Order cam and key separately.

**Cams:** see suitable cam A0210. Select "without projection" cam type.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart;

ch = h - lh where;

**ch** = required cam off-set/height.

**h** = grip length (distance between inside of latch face and front of cam).

**lh** = body length of cam latch/lock to be used (see product table below).

Keys: see A0102.

**Rods & Guides:** to achieve 3-point latching - A0303, A0321, A0325.

Order No.	Insert driver	$d_1$	$h_1$	lh
A1103.AW0020	Square 8	28	6	18
A1103.AW0040	Triangle 7	28	6	18
A1103.AW0050	Triangle 8	28	6	18
A1103.AW0060	3mm Double Bit	28	6	18
A1103.AW0070	4mm Double Bit	28	6	18


Available	insert dri	vers:		
Square 8	Triangle 7	Triangle 8	3mm Double Bit	4mm Double Bit
8	6.5	8	Ø3	Ø <u>4</u>



## **Wixroyd Cam Latches**

general information




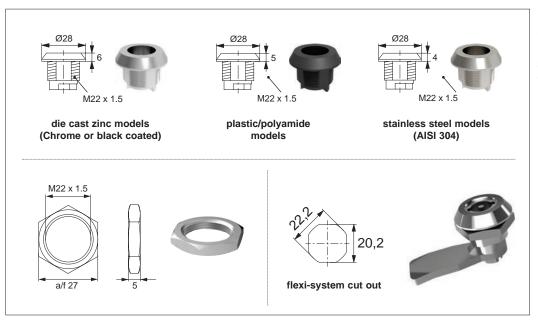

#### **Dimensions of our** cam latch housings

Dimensions apply to our standard range of flexi-system cam latches.

#### Available insert drivers for flexi-system latches

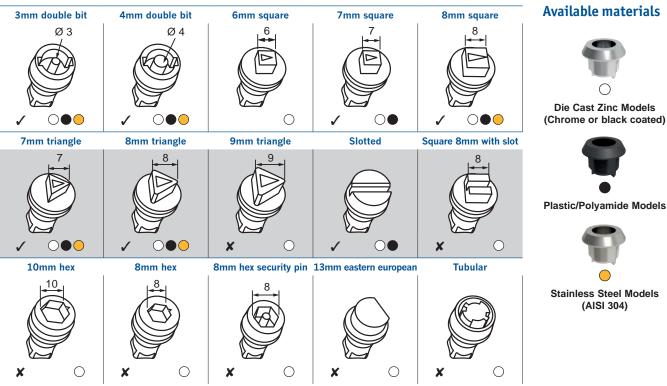

✓ Available as part of our standard range

Available subject to a minimum order quantity





ov-WA1004-A-T-WA1251-A-TCC0460-cam-latches-general-information-rnh- Updated -26-10-2022



## Flexi-System


at the core of all your cam latch requirements



ov-WA1003-A-TCC0400-WA2503-A-TCC2200-flexi-system-cam-latch-requirements-lnh-Updated -26-10-2022

All our cam latches use a standard cut out dimension of 22,2 Ø and 20,2 square which accommodates many industry standards. Flexi-System parts are fully interchangeable, providing a completely flexible hardware system including two or three point latching systems.

#### Flexi-system

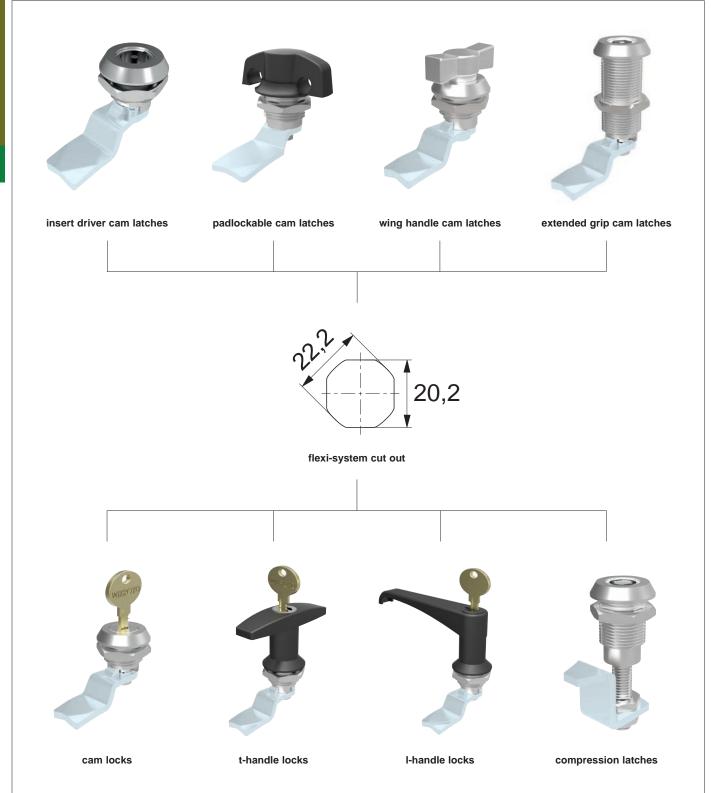





## **Wixroyd Cam and Compression Latches**

flexi-system cut out product selection charts





	Actua	tion			Body	,	Fir	nish	es	Ca	m	
	Meth	10d								Ту	pe	
			Sody length (mm)		Polyamide Plastic	_	ъ			=	<u>=</u>	
	er	rip	묘	inc	P	Stainless Steel	Chrome Plated	ted		cţio	N/O Projection	
	Oriv	5	ang	st Z	ide	SS	Б	Soat	_	roje	roje	ng
	nsert Driver Sylinder Locl	Janual/Grip	<u>×</u>	Die-Cast Zinc	yan	inle	omo	Black Coatec	Natural	Vith Projec	O P	P Rating
	Inse	Mai	Boc	Die	Pol	Sta	Chr	Bla	Nat	×	$\geq$	<u>a</u>
A1203 - Cam La	atch - Fi	nger	Han	dle	- Fix	ed (	Grip					
			(0									
5		1	Various	/				/	1		1	
		·	Var	ľ				·	·		·	
		ams:				24,	A02	40 -	- Ke	ys: N	N/A	
A1210 - Cam La	atch - Ta	mpe	r Evi 	den	t					l		l
		/	20	1			1				1	
									.,	.		
A1241 Com La		ams:			A02	24,	A02	40 -	- Ke	ys: N	I/A	
A1241 - Cam La	11011 - 31	eppe	G	rip								
(Pa)			s.									
	1		/arious	1			1					65
(A)			\ \									
									010			
A1251 - Cam La	atch - Fi				ppli		Key	rs: A	(O1C	)2		
A1231 - Cam La	1011 - 11	ACU L				uy						
Toll 1			sn									
	✓		/arious	1			1				1	54
			>									
	Car	ms: A	\ \ 	3 V	022	ΛΛ	 ∩24	O - 1	Kave	. AC	1103	
A1580 - Compre							J24	J - 1	neys	,. AU	, 1 02	-
			,	,	٦							
	✓		18	1			1					
			l Cai	ns:	N/A	- K	evs:	AO1	02	l		
A1601 - Compre	ession L	atch					,					
0					-							
							_					
	<b>/</b>		31	′			/	/			/	54
The second												
		Carr	ı ıs: A	020	3, A	022	4 - I	Keys	s: AC	) 102	2	I
A1603 - Compre	ession L											
0												
	,		20			,			,		,	F 4
	<b>V</b>		38			/			/		/	54



Cams: A0231, A0233 - Keys: A0102


# Panel Latches - Snap in Fixed grip, wing handle, finger grip



AM LATCH



A1185

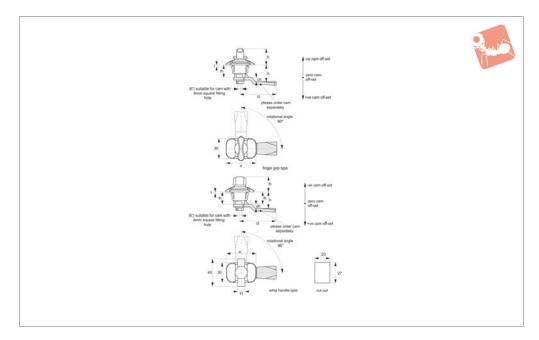

#### Material

Body and Handle: Black plastic (PA6). **Not supplied**: Cam - order separately.

#### **Technical Notes**

Order cam and key separately. Cams: see suitable cam A0203, A0224 and A0240. Select "with projection" cam type. Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam offset), and refer to cam selection chart; ch = h - lh where;

ch = required cam off-set/height. h = grip length (distance between inside of latch face and front of cam). lh = body length of cam latch/lock to be

used (see product table below).
Suitable for panel thickness 0,8-2mm
Keys: see A0102.

#### Tips

Easy snap on fix mounting. Make cut out in panel as shown, and simply push in handle, snap on clips will spring back to securely mount handle.


Wing handle enables easy actuation without the need for a key.

Order No.	Handle	а	b	t	lh
A1185.AW0010	Wing Handle	43	22.5 24	0,8-2	18.5
A1185.AW0020	Finger Grip	43	24	0,8-2	18.5



# Cam Latches - Snap in - Flexi-System Wing handle, fixed grip, zinc



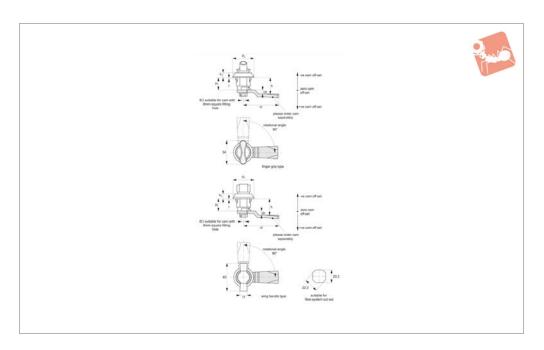



A1195

#### Material

Body and Handle: Black plastic (PA6). **Not supplied**: Cam - order separately.

#### **Technical Notes**

Order cam and key separately.

Cams: see suitable cam A0203, A0224 and A0240. Select "with projection" cam type. Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam off-

set), and refer to cam selection chart;
ch = h - lh where;

ch = required cam off-set/height.

**h** = grip length (distance between inside of latch face and front of cam).

**Ih** = body length of cam latch/lock to be used (see product table below).
Suitable for panel thickness 0,8-1.5mm **Keys:** see A0102.

#### **Tips**

Easy snap on fix mounting. Make cut out in panel as shown, and simply push in handle, snap on clips will spring back to securely mount handle.

Wing handle enables easy actuation without the need for a key.

Order No.	Handle	$d_1$	$h_1$	t	lh
A1195.AW0010	Finger Grip	Ø30	7.5	0,8-1,5	18
A1195.AW0020	Wing Handle	Ø30	7.5	0,8-1,5	18




When selecting a Wixroyd Cam Latch for your application, you need to answer these questions:

- 1. Which installation cut out?
- 3. Which locking key?
- 5. Which cam type and size?

- 2. Which body style?
- 4. Which accessories?

#### Step 1: Which installation cut out?

All our Flexi-System cam latches use a standard installation cut out 22,2 dia, 20,2 square, for maximum flexibility. We also provide a number of alternative cut out dimensions for legacy/historical installations.



flexi-system cut out

Typically single point latching is required, but the

Wixroyd Flexi-System also provides multi-point latching (typically 3 point - at lock point, top and

Number of latching points in application

#### Step 2: Which body style?

#### Material and finish

Select from our variety of die cast zinc, polyamide plastic and stainless versions.







Polyamide





**Stainless** 

Single point

bottom of cabinet).



Two point



Multi-point

zinc chrome plate

zinc black coated

Die-cast

Standard insert driver type, cylinder lock or wing

**Actuation and locking method** 

handle type.



Insert driver





Wing handle

Cylinder lock

Step 3: Which locking key?

#### **Standard insert** driver keys

Our range of insert driver cam latches require a simple key to actuate. Refer to part A0102 and A0103 for correct keys.





#### **Cylinder locking**

Our cam locks with cylinder locks are supplied with two keys per lock. Available as keyed alike or keyed to differ locks.



#### Step 4: Which accessories?

- Multi-point latching: use our rod set A0303 to A0325 for suitable rods and rod guides.
- Finger pulls: easily installed with any of our flexi-system cam bodies, finger pull no. A0352 is a simple, cost effective handle for your cabinets.
- Dust Cap: to reduce material ingress.









#### Selecting the Correct Cam Latch or Lock



#### With or without "Projection"

Different cam bodies require cams either with or without projection.

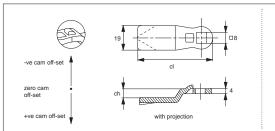

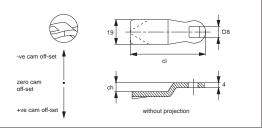

# Step 5: Which cam type and size?

Wixroyd cams are available in a number of different materials; zinc plated steel, stainless steel (AISI 304) and black plastic.

# With projection cams prevent turning of the cam over 45°, but is not suited to all cam bodies. For correct projection type please see individual cam body technical pages.

#### **Number of Latching Points**

Single point cams are suitable where just single point latching is required. Multi-point cams are for applications requiring 2 or 3 latching points.

#### Cam off-set (dimension ch)

To ensure your cam fully and correctly engages with the frame of your door the correct cam offset must be selected. A cam off-set can be either negative (-ve) or positive (+ve).

#### Cam length (dimension cl)


This impacts the reach of the cam to door frame and hence impacts positioning of cam body for installation. Cam length is measured from the centre of the cam fixing hole to the cam's leading edge. Most typically cams are 45 mm in length.

Use formula to calculate ch (required cam offset), and refer to the cam selction chart.

ch = h - lh where:

ch = the required cam off-set/height

n = grip length (distance between inside of latch face and front of cam).

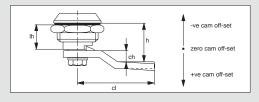

# Calculation of correct cam off-set

This is the most important aspect of the selection process.

#### **Example one**


Cam body A1003.AW0010 has been selected for the application. If we refer to the data sheet for this part, suitable cams are parts A0203, A0210 or A0240 - "without projection".

Known application information: h = 26 lh = 18

Therefore; ch = 26 - 18 = +8

Cam off set of +8 is required

Using the data tables for cams A0203, A0210, and A0240 we can select the following cams without projection with an off set of + 8; A0203.AW5408 (steel), A0210.AW0428 (stainless) or A0240.AW0108 (three point cam).

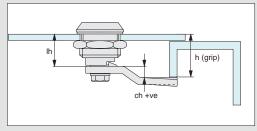

#### **Example two**


Cam body A1003.AW0010 has been selected for the application. If we refer to the data sheet for this part, suitable cams are parts A0203, A0210 or A0240 - "without projection".

Known application information: h = 14 lh = 18

Therefore; ch = 14 - 18 = -4

The required cam off set is negative, - 4 as the application's door frame is effectively shorter/lower than the length of the cam body

Using the data tables for cams A0203, A0210 and A0240 we can select the following cam without projection with an off set of - 4; A0203. AW6404 (steel).

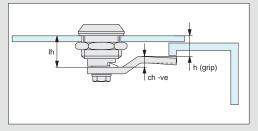

# **Example of calculation of correct cam off-set**





# Wixroyd Cam Latches, Locks and Swing Handles

cam selection chart



#### **Suitable With Projection Cams** Compatible A0261 A0203 A0210 A0240 cam no. 6 x 6 square 8 x 8 square 8 x 8 square 8 x 8 square **Cam fitting** hole A2503 / A2504 A2523 / A2528 A2503 / A2504 A2523 / A2528 Cam latch / A2503 / A2504 A1261 / A1281 / A2390 A2523 / A2528 lock no.

#### Suitable Without Projection Cams Table 1

Compatible cam no.	A0203	A0210	A0240	A0243
Cam fitting hole	8 x 8 square			
Cam latch / lock no.	A1003 / A1021 / A1103 A1161 / A1168 / A1181 A1203 / A1210 / A1251 A1601 / A1620 / A1801 A2001 / A2203 / A2326 A2333 / A2392 / A2526 A4221 / A4241 / A4260 B1082 / B1086 / B1088 B1091 / B1092 / B1180 B1281 / B1285 / B1380 B1450 / B2091 / B2181	A1003 / A1021 / A1103 A1161 / A1168 / A1181 A1203 / A1210 / A1251 A1601 / A1620 / A1801 A2001 / A2203 / A2326 A2333 / A2392 / A2526 A4221 / A4241 / A4260 B1082 / B1086 / B1088 B1091 / B1092 / B1180 B1281 / B1285 / B1380 B1450 / B2091 / B2181	A1003 / A1021 / A1103 A1161 / A1168 / A1181 A1203 / A1210 / A1251 A1601 / A1620 / A1801 A2001 / A2203 / A2326 A2333 / A2392 / A2526 A4221 / A4241 / A4260 B1082 / B1086 / B1088 B1091 / B1092 / B1180 B1281 / B1285 / B1380 B1450 / B2091 / B2181	A1003 / A1021 / A1103 A1161 / A1168 / A1181 A1203 / A1210 / A1251 A1601 / A1620 / A1801 A2001 / A2203 / A2326 A2333 / A2392 / A2526 A4221 / A4241 / A4260 B1082 / B1086 / B1088 B1091 / B1092 / B1180 B1281 / B1285 / B1380 B1450 / B2091 / B2181

#### **Suitable Without Projection Cams Table 2**

Compatible cam no.	A0250	A0234	A0215	A0231	A0233
Cam fitting hole	5 x 5 square	6,3 dia. x 4,9	7 x 7 square	8 x 10 dia.	8 x 10 dia.
Cam latch / lock no.	A4600 / A4620	A1661 / A1667	B2082 / B2084 / B2086 B2088 / B2285 / B2380	A1603 / A1611 A1630 / A1810	A1603 / A1611 A1630 / A1810

#### **Calculation of correct cam off-set**

#### Cam off-set


Use the formula to calculate your correct cam off-set:

ch = h - lh

ch = the required cam off-set.

h = distance between inside of lock face and front of cam (also referred to as "grip length").

Ih = length of cam body to be used (refer to individual cam body data sheets).

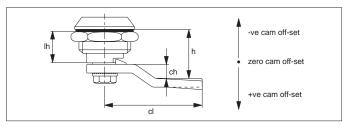

#### Cam Off-Set (dimension ch)

To ensure your cam fully and correctly engages with the frame of your door the correct cam off-set must be selected. A cam off-set can be either negative (-ve) or positive (+ve).

#### Cam Length (dimension cl)

Impacts reach of the cam to door frame and hence impacts positioning of cam body for installation. Cam length or reach is measured from the centre of the cam fixing hole to the cam's leading edge. Refer to individual cam body datasheets.






## **Wixroyd Cam Latches**

technical specification and advice



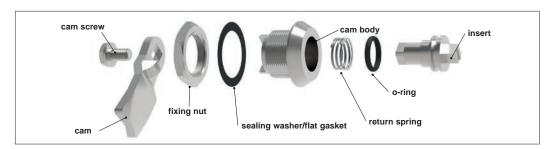

#### Physical and chemical characteristics of polyamide

Physical condition	solid (at 20°C)
Density	> 1,0 g/cm3
Yield Point	220°C
Smell	No particular smell
Dissolvability in water	Undissolvable
Segregation temperature	> 350°C
Fire Point	>390°C
Auto ignition temperature	> 400°C

#### Zinc

ov-WA1003-A-TCC0400-WA1630-A-T-cam-latches-technical-specification-advice-rnh- Updated -26-10-2022

Zinc Alloy is the most fundamental material for the Wixroyd product range. Housings, inserts, handles, spacers, keys, hinges etc, are all die cast products. The zinc used is a zinc alloy with the following contents (except zinc): Al 4,03% Cu 0,83% as well as minor contents of Mg, Fe, Pb, Cd, Sn and Ni.

#### **RoHS Compliance**

Our Cam Latches are RoHS Compliant.



**Materials** 

#### **Plastic - Polyamide**

Many of our products are made of injection moulded plastic, normally polyamide. When needed, we add fibreglass to the material, in order to optimise qualities of the product. Examples of products made out of polyamide: handles, housings, rod quides etc.

#### **Degrees of sealing protection**

A product classified to an IP rating has either been tested in an independent laboratory, or due to the resemblance of its structure to a tested product, classified as IP.

Important note: We can only guarantee our products correspond to the indicated classification when assembled and used correctly.



IP54 RATED

22h/100° 70h/100°

IP 65: Dust Tight and Jetting Secure. Through the application of an o-ring and a flat gasket, this higher classification can be achieved.

IP 54: Dust and Splash Protected. This is the standard classification for our products. Equivalent to NEMA3.

#### **IP** ratings

Flat gaskets/ **Sealing Washer** 

Character	Value	Standard	
Density	1,35 g/cm3	DIN 53479	
Hardness	65 Shore A	DIN 53505	
Breaking Strain	5 N/mm2	DIN 53504	
Expansion	200%	DIN 53504	
Heat & cold	max. 70°C,		
resistance	min35°C		

Through the application of a flat gasket between the lock and the door, class IP 65 or NEMA 4 is achieved.

Character	Value	Standard
Density	1,240 g/cm3	DIN 53479
Hardness	71 Shore A	DIN 53505
Breaking strain	14 N/mm2	DIN 53504
Expansion	280%	DIN 53504
Recoil elasticity	32%	DIN 53512
Heat & cold	max. 120°C,	
resistance	min -40°C	

Pressure deformation test					
Time/temp.	Type of test	Standard	Result		
22h/100°C	DVR	DIN 53517 A	9%		
70h/100°C	DVR	DIN 53517 A	12%		

The flat gasket is made out of a mixture of NBR (Nitrile Rubber) and SBR (Styrolbutadiene Rubber). This gives the gasket a satisfactory chemical resistance and a good constancy to oil.

For all O-rings, an NBR material with the following technical characteristics is used.


#### **O Rings**






#### Flexi-system cut out

Our flexi-system is based on a standard installation cut out 22,2 Ø and 20,2 sq.




Option 1: Installation when fully assembled

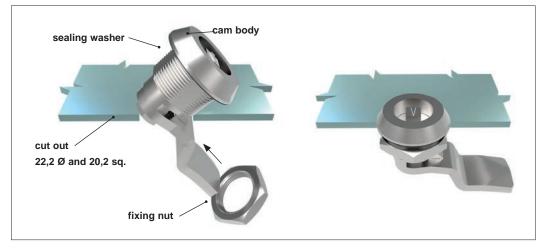

When the cam latch grip (h) is 9mm or more this method is possible:-

- 1. With the cam body and cam fully assembled, attach the sealing washer to cam body.
- 2. Tilt the latch 45° and pass it, cam first, through the installation cut out in the panel.
- 3. When in place attach the fixing nut to the cam body to secure. Tighten to 10 Nm max.

Option 2: Installation unassembled

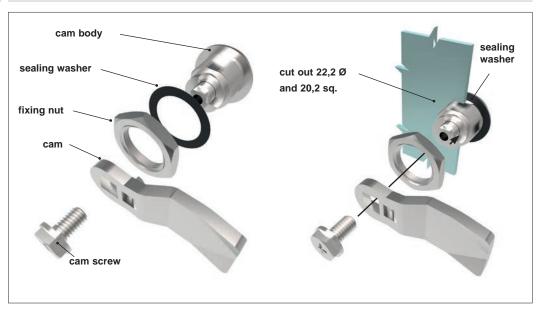

When the cam latch grip (h) is less than 9mm this method is suitable:-


- 1. Prior to commencing ensure that the cam body, cam, cam screw, fixing nut and sealing washer are completely unassembled.
- 2. Attach the sealing washer to the cam body and pass through installation cut out in panel.
- 3. Attach the fixing nut to the cam body to secure. Tighten to 10 Nm max.
- 4. Attach the cam to the cam body. Once you have ensured that the cam has the correct orientation toward the panel frame, secure the cam screw and tighten to 4 Nm.





# Cam Latches - 3A Standard hygienic line, stainless steel



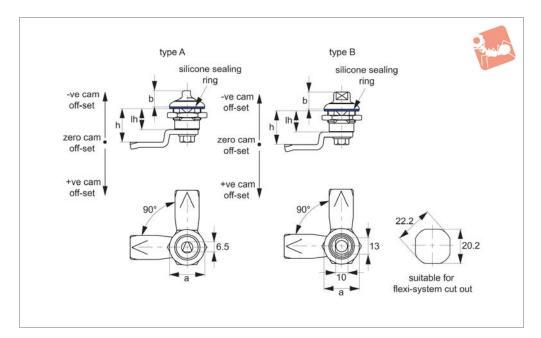



A1104

#### Material

Body: Stainless steel AISI304 Handle: Stainless steel AISI304

Blue gasket: silicone Gaskets provide IP69K rating.

**Supplied with:** Nut and screw: Stainless

steel AISI304

Not Supplied: CAM nor KEY - order separa-

#### **Technical Notes**

Order cam and key separately.
Cams: see suitable cam A0203 (steel) and

A0210 (Stainless Steel) A0224 and A0240.

Select "without projection" cam type. Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam off-set), and refer to cam selection chart; ch = h - lh where;

ch = required cam off-set/height.
H = grip length (distance between inside
of latch face and front of cam).
lh = body length of cam latch/lock to be
used (see product table below).

Keys: see A0104.

#### Tips

Made to the high "3A" standard. This ensures it meets the high standards required for use in food, beverage, pharmaceutical and medical applications. Hygienically designed for effective and easy cleaning, corrosion resistant, nontoxic.

Design precludes contamination by dirt, food particles and organic matter.

Order No.	Insert driver	a	b	lh
A1104.AW0010	triangle 7	28	13	18
A1104.AW0110	Stadium	28	13	18

